


Dimensions

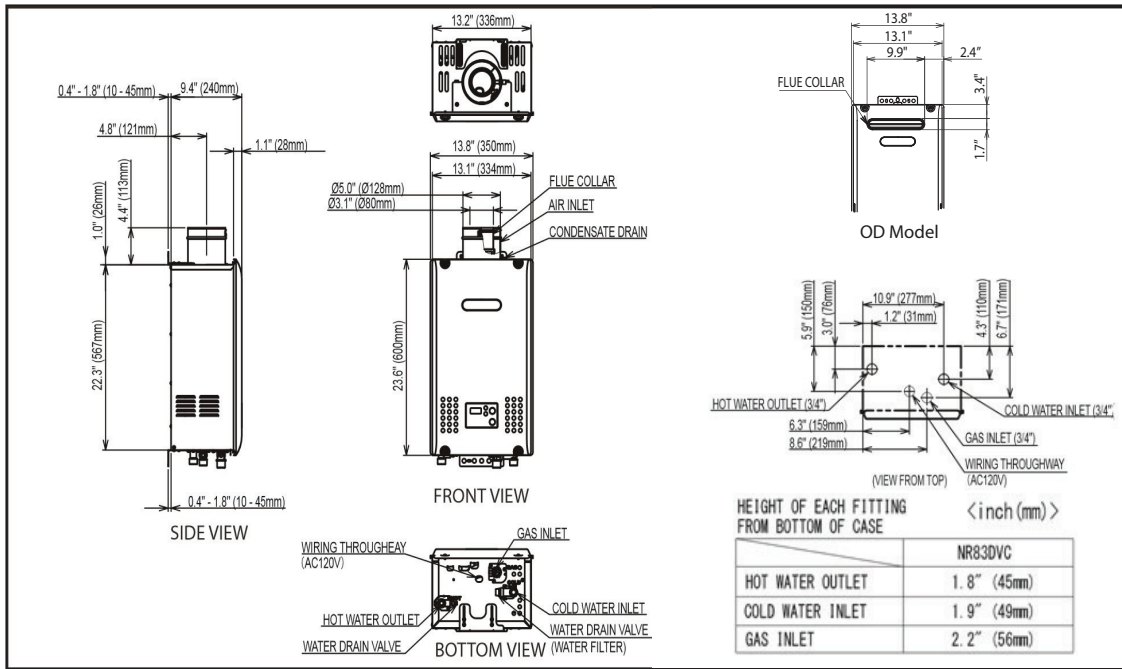


Flow Rates

Temperature Rise (°F)	30	40	45	50	60	70	80	90	100
Flow Rate (GPM)	8.3	7.6	6.7	6.1	5.0	4.3	3.8	3.4	3.0

For peak flow rates in shaded areas, contact Noritz for proper setting

Pressure Loss

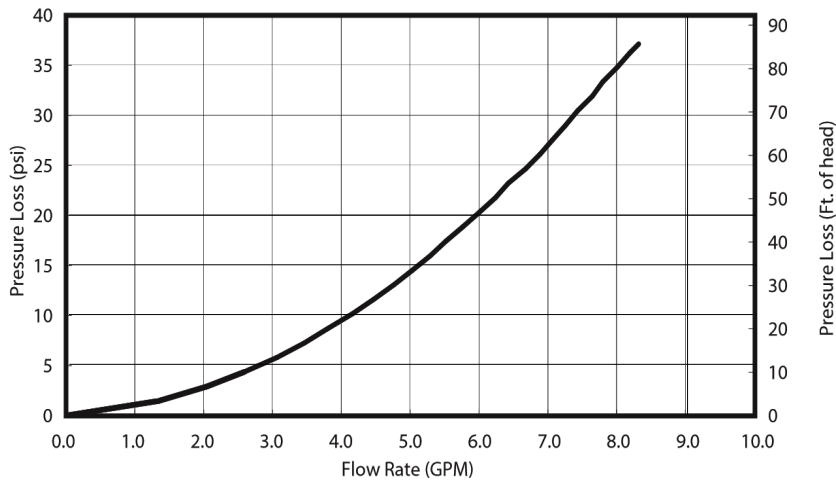

Specifications

Model Name		NR83OD (GQ-2457WS US) NR83DVC (GQ-2457WS-FFA US)
Weight		49 (Pounds)
Water Holding Capacity		0.2 Gallons (0.95 L)
Connection Sizes	Water Inlet	3/4"
	Hot Water outlet	3/4"
	Gas Inlet	3/4"
Power	Supply	120VAC (60Hz), Less than 2 amperes
	Consumption	(-DVC)NG:82W LP:90W (-OD)NG:67W LP:69W (W/T Freeze Prevention: 161W)
Freeze Prevention		Indoor: -30°F(-DVC) Outdoor -4°F(-OD)
Temperature Settings	F° Mode	115-140°F (In5°F Intervals)(6 Options)
	C° Mode	46,47,48,50,55,60°C (6 Options)
Default Temperature Options	F° Mode	120,125,130,140°F (Default is 120°F)
	C° Mode	50,52,55,60°C (Default is 50°C)