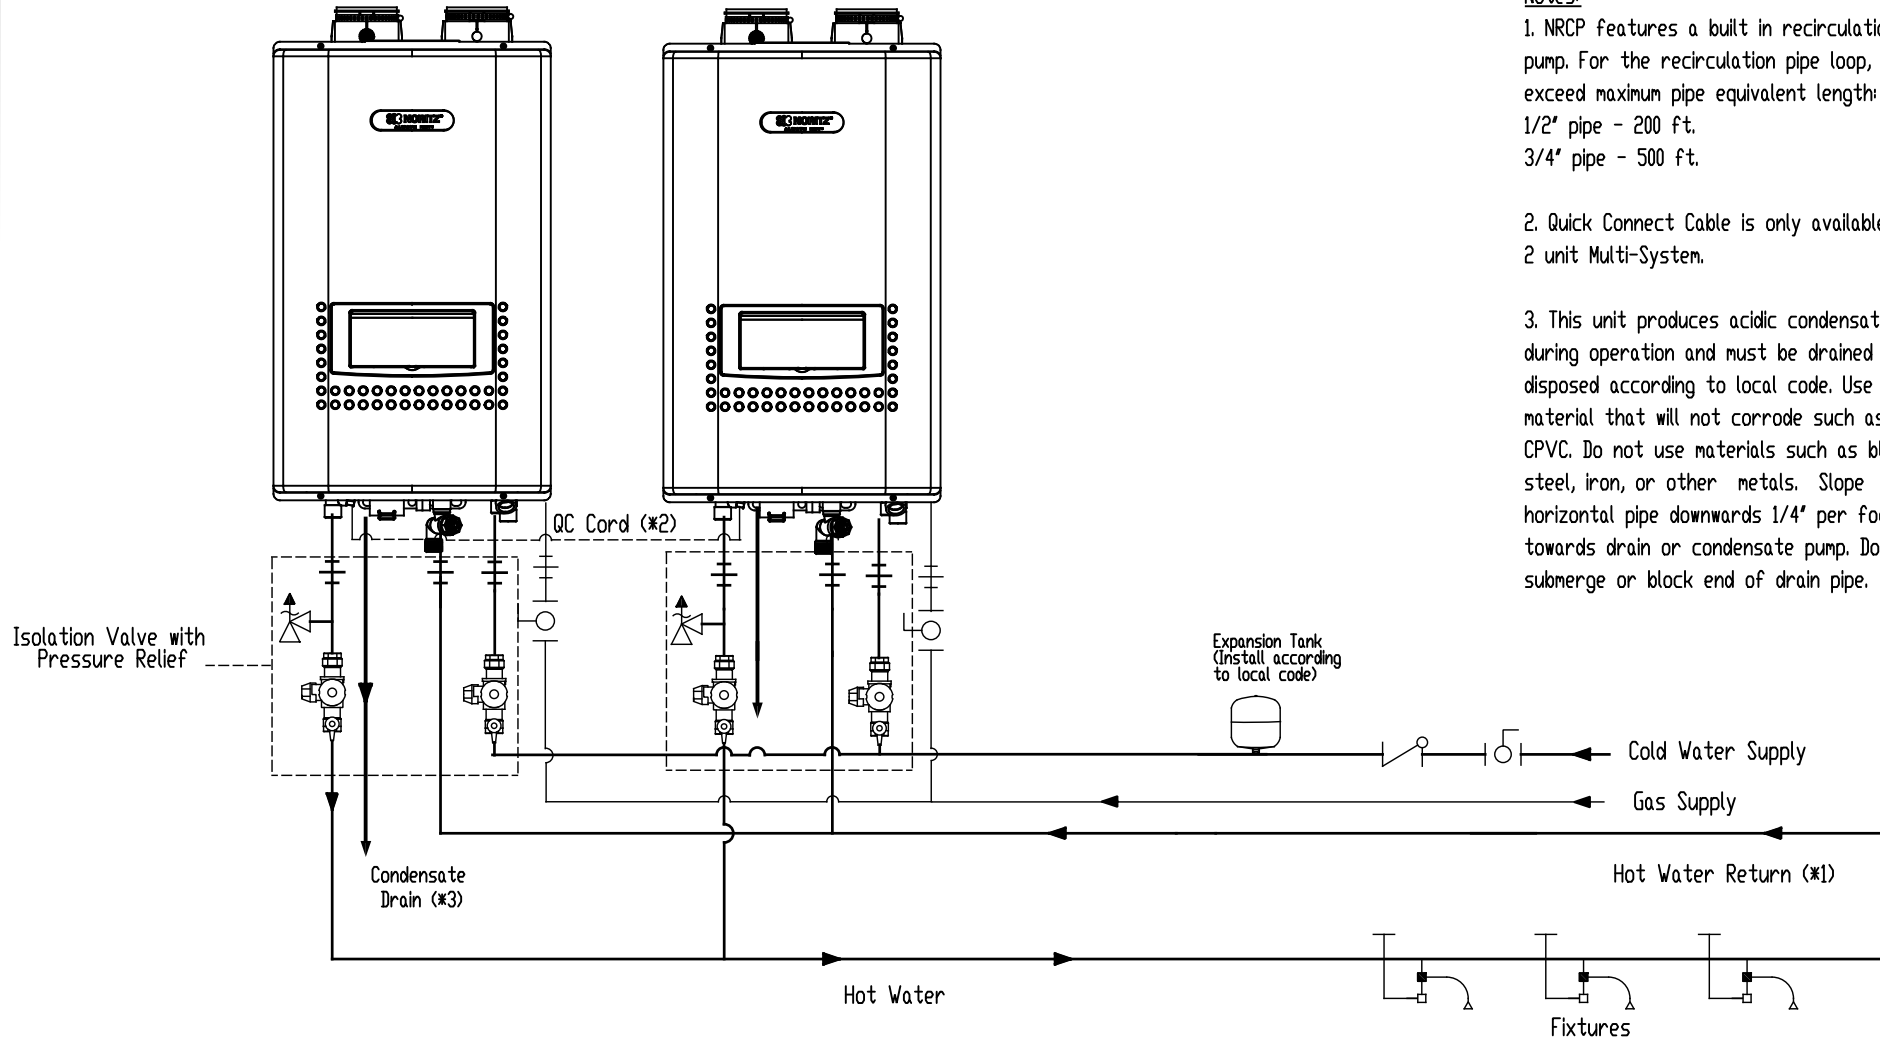


REVISIONS			
REV.	DESCRIPTION	DATE	APPRVD.

Notes:




1. NRCP features a built in recirculation pump. For the recirculation pipe loop, do not exceed maximum pipe equivalent length:
 1/2" pipe - 200 ft.
 3/4" pipe - 500 ft.
2. Quick Connect Cable is only available for 2 unit Multi-System.
3. This unit produces acidic condensate during operation and must be drained and disposed according to local code. Use pipe material that will not corrode such as PVC or CPVC. Do not use materials such as black steel, iron, or other metals. Slope horizontal pipe downwards 1/4" per foot towards drain or condensate pump. Do not submerge or block end of drain pipe.











NORITZ
 11160 Grace Avenue
 Fountain Valley, California 92708
 866-7NORITZ (866-766-7489)
 www.noritz.com

MODEL:
 Residential Condensing-
 NRCP
 APPLICATION:
 Domestic Hot Water
 Quick Connect System
 Recirculation
 DRAWING NUMBER:
 NRCP-REC-QC
 DRAWING DATE:
 October 2018

Noritz Accessories

-  Isolation Valve with Pressure Relief
-  Residential Neutralizer
-  Quick Connect Cable, for 2 unit Multi-System

Note: This diagram is for reference only. Installation must comply with State and Local Code, all gas and water pipe must be sized correctly to specific length, according to accepted engineering methods or the UPC Code for Noritz Water Heaters to operate correctly.

-  Shut-off Ball Valve
-  Check Valve
-  Union
-  Pressure Relief Valve (Watts 174A, Zurn P3000BR, Cash Acme F-82)
-  Aquastat (Honeywell Model #L6006A or L6006C)
-  Pump
-  Mixing Valve
-  Thermal Expansion Tank